




CASOL SYSTEMS PRIVATE LIMITED

DOOR ACCESS CONTROLLER - MULTI DOOR

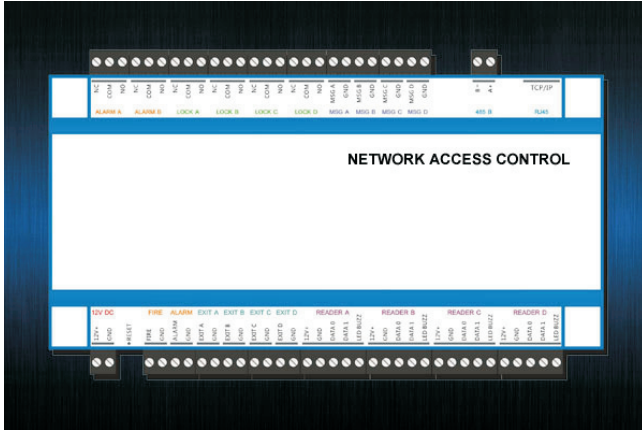

CS-MD-E01/E02/E04

FEATURES:

- Standard TCP / IP communication, multi-stage lightning protection, surge protection
- Large-capacity Flash memory, save data is not lost power for 10 years
- All chip imported new and original, to meet industrial requirements, to meet a wider range of work environments
- All inputs with optocoupler protection, the system is more stable
- Each door opening time up to 16 groups choose different ways to identify
- Identification of a variety of ways to open the door: card, password, card + password, double cards, free passage, timed door switch, timer alarm
- Support for remote operation switch door; switch fire alarm
- Support cross-regional anti absconds machine; support interlocked
- Support for multiple event alarm output, such as invalid card, invalid time, door alarm, the door opened out
- All Weigand interface is compatible 26,34,37 agreement with optocoupler protection.
- It sends data, quantitative restrictions transmission from the controller
- Support individual settings for each card is valid
- All access devices support a mixed installation
- With the support and attendance software, on-line patrol function
- Support multi-user multi-machine management and monitoring in real time
- Webcam installed, with multi-functional electronic map, can achieve real-time network monitoring and video capture

PRODUCT DESCRIPTION:

Network Access Controller 1 Door / 2 Door / 4 Door access controller is one of the TCP/IP access controllers which use standard industrial TCP/IP network. There is no limitation of device qty. It connects 2 card readers to realize card swiping for door entry or exit and anti pass back. And it has built in WEB management and we can manage it directly.

Performance Parameters	
Card Capacity	30000
Record stock	60000
Alarm Log	60000
communication method	TCP / IP
Communication distance	Unlimited
Card reader	Wiegand (Wiegand) protocol
Open the door	Single card, password, card + password, double cards, remote software, free passage, buttons, timed



CS-1001A-26/34
CS-2001A-26/34

Reader Specification:	
Product Material	Plastic Housing
Very Low Power Consumption	Static Current less than 30mA
Output Format	Wg26

“Haadhi Complex”, Second Floor, 15, Police Commissioner Office Road, Egmore, Chennai - 600 008.
Ph : 91 44 - 28192189 / 2199 Toll Free : 1800 121 4881
email : casolsys@gmail.com www.casolsystems.com

Disclaimer: Specifications can be changed without prior notice.